

Closer to customers.  
Farther in our research.




Cotesi is a company with a vast experience in research and development, which takes pride in the close contact with its customers.

It is through this contact that we gather all the information we need to maintain the leadership in innovation and, above all, be able to respond most efficiently to the problems of those who make fishing their business.

It is because we have such respect for their work that we continue determinedly our research to offer the best solutions for the fishing industry.

Over 50 years working for those who make fishing their business.

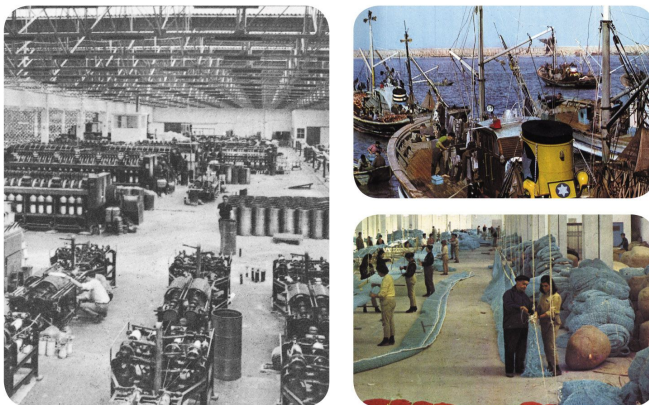

Cotesi has an experience built in time through human contact and with the knowledge of those who make the sea their daily job.

Our main goal is to seek the best solutions for the fishing industry.

**COTESI** Companhia de Têxteis Sintéticos, S.A.

Avenida do Mosteiro, 486 | 4415-493 Grijó | PORTUGAL  
Telf.: +351 227 476 500 | Fax: +351 227 646 575 | +351 227 451 759  
e-mail: marine@cotesi.com | www.cotesi.com



**COTESI**


MARINE AND FISHING DIVISION



NETS



REF. mm	RUNNAGE		KNOT RESISTANCE	
	M/kg	Tol.	Kgf	Tol.
1,1	1300		128	
1,5	990		186	
1,8	670	±5%	230	±10%
2,2	430		286	



High performance netting made of HMWPE® fibre. Its strength allows the use of twines with a smaller diameter. HMWPE® when used in trawl nets allows a reduction of up to 50% on twine diameter, compared to polyamide twines of same breaking strength. Exclusive protective coating ensures excellent abrasion resistance and a longer life time.

A lighter net leads to significant less drag resistance in water and considerable fuel savings or higher towing speed.

- Very high tenacity knot;
- Very high resistance compared to twine diameter;
- Double knot prevents knot slippage and net distortion;
- Exclusive protecting coating;
- Thermo-stabilized for dimensional uniformity and stability of the meshes.



REF. mm	RUNNAGE		KNOT RESISTANCE	
	M/kg	Tol.	Kgf	Tol.
0,5	3660		45	
1,0	1700		90	
2,0	850	±5%	180	±10%
3,0	590		270	




High performance netting made of twisted HMWPE fibre. Its strength allows the use of twines with a smaller diameter which may result in up to 50% thinner twines compared to polyamide of the same wet knot strength. The lower weight of D-TECH netting leads to significant less drag resistance in water ending in considerable fuel savings or higher towing speed. A custom built impregnation technique and an exclusive protecting coating ensures excellent abrasion resistance and a longer life time.

- Very high tenacity knot
- Very high resistance compared to twine diameter;
- Double knot prevents knot slippage and net distortion;
- Exclusive protecting coating
- Thermo-stabilized for dimensional uniformity and stability of the meshes



REF. mm	RUNNAGE		KNOT RESISTANCE	
	M/kg	Tol.	Kgf	Tol.
2,2	375		280	
2,8	230		486	
3,2	200	±5%	630	±10%
4,0	162		772	
5,0	90		1056	
5,5	75		1190	




After a long research COTESI has developed a product that joins the best of two worlds: resistance and durability. TITANIUM nets offer the best price/performance ratio as it allows to reduce twine diameter up to 30% at a competitive cost compared to a 100% HMWPE® twine.

- Compact twine-REDLINE construction with HMWPE® core;
- High tenacity knot;
- Thin and soft twines, very easy to handle;
- Low sand penetration;
- High breaking strength;
- Up to 30% reduction on twine diameter;
- Thermo-stabilized for dimensional uniformity and stability of the meshes.



REF. mm	RUNNAGE		KNOT RESISTANCE	
	M/kg	Tol.	Kgf	Tol.
1,2	875		75	
1,8	600		90	
2,2	380		148	
2,6	270		203	
2,8	225		245	
3,2	200		285	
3,6	162		345	
4,0	127	±5%	460	±10%
4,5	100		550	
5,0	84		640	
5,5	68		720	
6,0	60		800	
7,0	50		860	
8,0	40		1100	




- High-tenacity knot;
- Excellent abrasion resistance;
- Low sand penetration;
- Thermo-stabilized for dimensional uniformity and stability of the meshes.

Well known for its red tracer, it's also known for being the best compact netting in the market. Produced from a high density polyethylene, in a special extrusion process, it is the result of a presence in the market for more than 50 years.



REF. mm	RUNNAGE		KNOT RESISTANCE	
	M/kg	Tol.	Kgf	Tol.
1,2	789		78	
1,5	630		95	
1,8	540		155	
2,2	342		213	
2,6	243		257	
2,8	202		300	
3,2	190		315	
4	160		380	
4,5	127	±5%	490	±10%
5	100		580	
5,3	84		680	
5,5	68		790	
6	60		880	
7	50		950	
8	40		1200	
9	28		1850	





- Soft twine easy to handle;
- High braking strength;
- High tenacity knot;
- Superior abrasion resistance;
- Untwisted knot;
- Thermo-stabilized for dimensional uniformity and stability of the meshes.

Specially developed to be used in cod-ends, it is made from high density polyethylene in a most modern extrusion technology, resulting on a high resistance soft twine that assures a better fish quality.



REF. mm	RUNNAGE		KNOT RESISTANCE	
	M/kg	Tol.	Kgf	Tol.
4,0	180		315	
4,5	140		450	
5,0	95	±5%	580	±10%
5,5	83		680	
6,0	71		790	
8,0	38		1200	



**GREENLINE XL**  
Results from the development of GREENLINE technology, and has been specially developed for the use in cod-ends in bottom trawling. The twine has a special treatment that reinforces its stiffness and that varies according to seabed conditions.


**GREENLINE XL Soft Bottom**  
Special for sand or mud bottom, GREENLINE XL Soft Bottom's special treatment prevents sand or mud from entering inside the twine.

**GREENLINE XL Hard Bottom**  
Special developed to be used on seabed. It has a special treatment to resist the high abrasion in rocky conditions

- Very low sand penetration;
- Very high-tenacity knot;
- Excellent abrasion resistance;
- Mesh stability;
- Untwisted knot;
- Thermo-stabilized for dimensional uniformity and stability of the meshes.



REF. mm	RUNNAGE		KNOT RESISTANCE	
	M/kg	Tol.	Kgf	Tol.
2,0	270		230	
3,0	205		315	
4,0	155	±5%	385	±5%
5,0	100		610	
6,0	75		710	




Made with high-tenacity Polyolefin fiber and extruded through a system exclusively developed by COTESI that guarantees this net to have superior abrasion resistance. We recommend the use of MOVLINE PLUS nets when superior abrasion resistance and high-mechanic resistance are demanded.

- Superior abrasion resistance;
- High-tenacity;
- Excellent breaking load;
- High-elasticity;
- Thermo-stabilized for dimensional uniformity and stability of the meshes.



REF. mm	RUNNAGE		KNOT RESISTANCE	
	M/kg	Tol.	Kgf	Tol.
2,3	450		90	
2,5	380		105	
2,7	310		125	
3,0	270		130	
3,5	225		160	
4,0	200	±5%	180	±10%
4,5	162		215	
5,0	127		265	
5,5	100		300	
6,0	84		360	
7,0	68		440	
8,0	40		670	



- Green color;
- High-density of Polyethylene;
- Braided construction;
- Lightweight;
- Good abrasion resistance;
- Thermo-stabilized for dimension uniformity and stability of the meshes.



REF. #	REF. mm	RUNNAGE		KNOT RESISTANCE	
		M/kg	Tol.	Kgf	Tol.
12,0	1,3	1320		17	
15,0	1,4	1025		20	
18,0	1,5	850		28	
21,0	1,6	745		32	
24,0	1,8	642		37	
27,0	1,9	570		42	
30,0	2,0	518		45	
33,0	2,1	470		49	
36,0	2,2	430	±5%	54	±10%
39,0	2,3	395		58	
42,0	2,4	368		63	
45,0	2,5	340		68	
50,0	3,0	295		81	
54,0	3,2	242		99	
60,0	3,4	216		110	
70,0	3,8	195		118	
90,0	4,0	140		164	



- Twisted construction;
- High-density Polyethylene;
- Lightweight;
- Good abrasion resistance;
- Thermo-stabilized for dimensional uniformity and stability of the meshes.



REF.	APP. DIA mm	RUNNAGE		KNOT RESISTANCE	
		M/kg	Tol.	Kgf	Tol.
8842	1,8	581		95	
8843	2	430		170	
4840/3	2,5	280		250	
4840/4	3,2	190		330	
4840/5	4,1	105	±5%	510	±10%
4840/6	4,4	90		565	
4840/7	5,1	70		580	
4840/8	5,8	50		820	
4840/9	7,2	35		1025	



- Braided construction;
- Good abrasion resistance;
- Excellent breaking load;
- High elasticity;
- Thermo-stabilized for dimensional uniformity and stability of the meshes;
- Possibility of a special coating upon request.